

BUTTERFLY VALVE

Designed to BS5155, this butterfly valve can be offered as a wafer pattern to suit most international standards or as a lugged pattern to suit PN16. Suitable up to 95°C working temperature.




Features

- Sizes 50mm to 300mm.
- Available as wafer or lugged pattern.
- Operation via lever, gearbox or actuator.
- Face To Face Dimensions to BS5155.
- Pressure Testing BS 6755 Part 1.
- WRAS approved version.
- Cast iron epoxy coated body with stainless steel disk/shaft/pins, EPDM seat.
- PN16 rated (25 bar option available).

Dimensions

Size mm	B	C	D	E	F	G	H	J	K
50 (2")	32	42	100	77	12.6	3	13.8	11.5	13
65 (2½")	32	44.7	120	77	12.6	3	13.8	11.5	13
80 (3")	32	45.2	127	77	12.6	3	13.8	11.5	13
100 (4")	32	52	156	92	15.7	5	17.77	12.9	13
125 (5")	32	54	190	92	18.9	5	20.92	15.9	13
150 (6")	32	55.8	212	92	18.9	5	20.92	15.9	13
200 (8")	45	60.6	268	115	22.1	5	24.1	15.9	13
250 (10")	45	65.3	325	115	28.4	8	31.45	22.2	13
300 (12")	45	76	403	140	31.6	8	34.6	22.2	19

Dimensions in mm

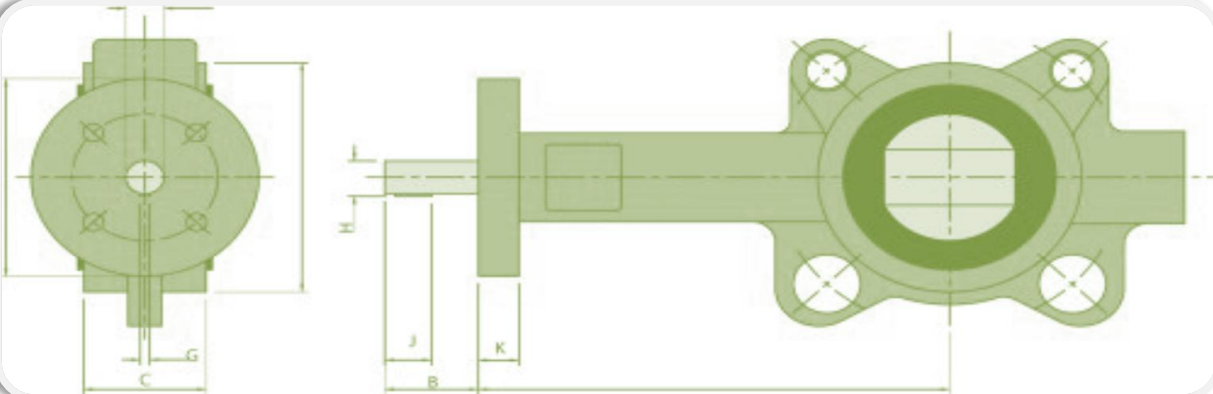

Please consult **Avarus Valves Limited** for any further assistance.